



MS6120 (6V12.0Ah)

MS6120 is a general purpose battery with 5 years life in standby service, or more than 260 cycles at 100% D.O.D by cyclic use. As with all MASTERSAFE batteries, all MS models are rechargeable, highly efficient, leak proof and maintenance free.



Specification


Cells Per Unit	3
Voltage Per Unit	6
Capacity	12.0Ah@20hr -rate t o 1.75V per cell @25°C
Weight	Approx. 1.8 Kg
Max. Discharge Current	120 A (5 sec)
Internal Resistance	Approx. 8 mΩ
Operating Temperature Range	Discharge: -20°C ~60°C Charge: 0°C~50°C Storage: -20°C ~60°C
Normal Operating Temperature Range	25°C ± 5°C
Float charging Voltage	6.8 to 6.9 VDC/unit Average at 25°C
Recommended Maximum Charging Current Limit	3.6 A
Equalization and Cycle Service	7.25 to 7.45 V DC/unit Average at 25°C
Self Discharge	RITAR batteries can be stored for more than 6 months at 25°C. Please charge batteries before using. For higher temperature, the time interval will be shorter.
Terminal	Faston Tab 187(F1)/Faston tab 250(F2)
Container Material	A.B.S. (UL94-HB) Flammability resistance of UL94-V2 can be available upon request.

DISTRIBUIDOR:

PLAYA SUR No. 20 INT. 2
COL. MILITAR MARTE
08830 IZTACALCO MEXICO, D.F.
TEL. 7090-7088 Y 7090-7089
ventas@regulacionups.com.mx
www.regulacionups.com.mx

ISO9001:2000 Certificate

Dimensions

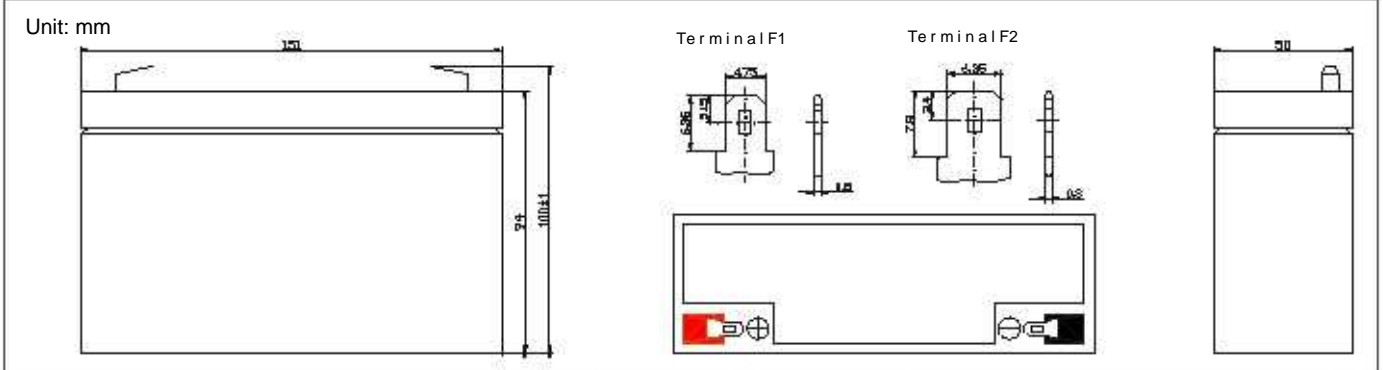

Constant Current Discharge Characteristics Unit: A 25°C)

F.V /Time	5MIN	10MIN	15MIN	30MIN	1HR	2HR	3HR	4HR	5HR	8HR	10HR	20HR
1.60 V	49.8	33.3	25.6	14.1	8.33	4.99	3.07	2.52	2.03	1.49	1.18	0.66
1.67 V	46.6	31.1	24.1	13.9	8.28	4.96	3.06	2.51	2.02	1.49	1.16	0.64
1.70 V	44.1	30.1	23.5	13.8	8.22	4.94	3.05	2.50	2.00	1.49	1.15	0.62
1.75 V	39.8	28.2	22.3	13.4	8.10	4.88	3.04	2.48	1.99	1.49	1.14	0.60
1.80 V	35.6	26.3	21.0	13.1	7.98	4.80	3.01	2.47	1.98	1.48	1.12	0.58
1.85 V	31.4	24.3	19.8	12.8	7.87	4.73	2.99	2.46	1.97	1.48	1.10	0.56

Constant Power Discharge Characteristics Unit: W (25°C)


F.V/Time	5 MIN	10MIN	15MIN	30MIN	1HR	2HR	3HR	4HR	5HR	8HR	10HR	20HR
1.60V	96.0	62.4	50.7	28.2	16.6	9.97	6.13	5.02	4.76	2.99	2.34	1.31
1.67V	90.0	60.0	48.1	27.7	16.6	9.91	6.12	5.00	4.73	2.99	2.32	1.26
1.70V	88.2	58.2	47.0	27.5	16.6	9.89	6.11	5.00	4.72	2.96	2.29	1.24
1.75V	79.7	55.8	44.6	26.9	16.3	9.73	6.07	4.97	4.70	2.95	2.27	1.19
1.80V	71.2	52.2	42.1	26.2	16.0	9.60	6.02	4.93	4.69	2.94	2.23	1.15
1.85V	62.7	48.6	39.6	25.6	15.7	9.46	5.98	4.90	4.68	2.94	2.20	1.12

All mentioned values are average values.


MS6120

6V12.0Ah

Temperature effects curve

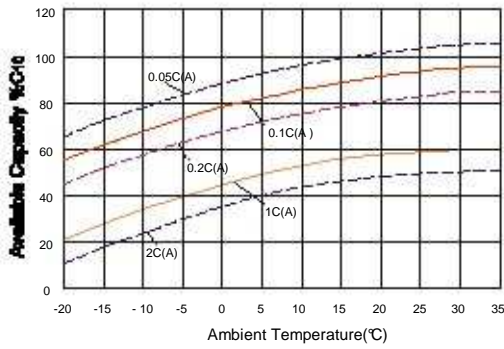

Storage characteristic

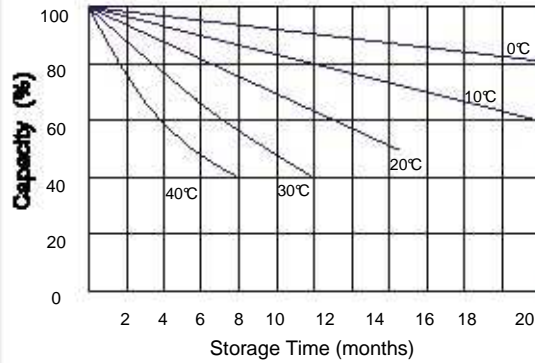


Supplementary charge required (Carry out supplementary charge before use if 1 00% capacity is requires)

Supplementary charge required before use. This supplementary charge will help to recover the capacity and should be made as early as possible.


Supplementary charge may of ten fail to recover the capacity. The battery should never be left standing till this state is reached

Supplementary charge and storage guide lines


Life characteristics of cyclic use

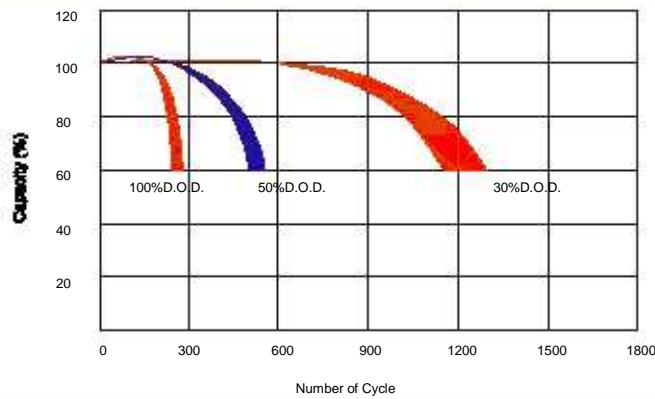


Effect of temperature on long term float life

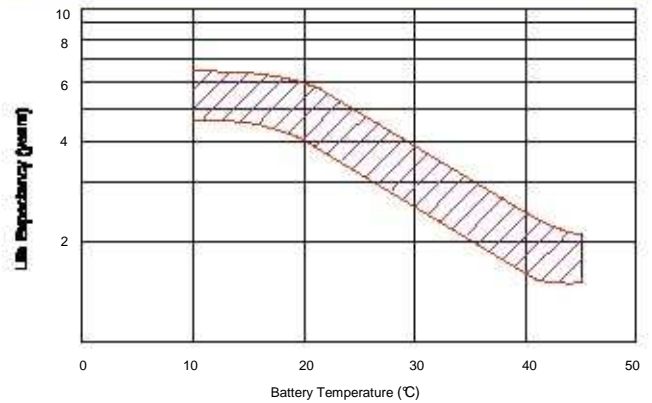

Charge characteristic Curve for standby use

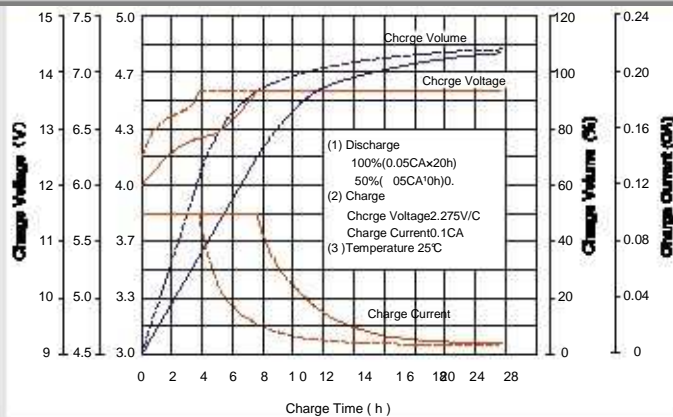

Discharge characteristic Curve

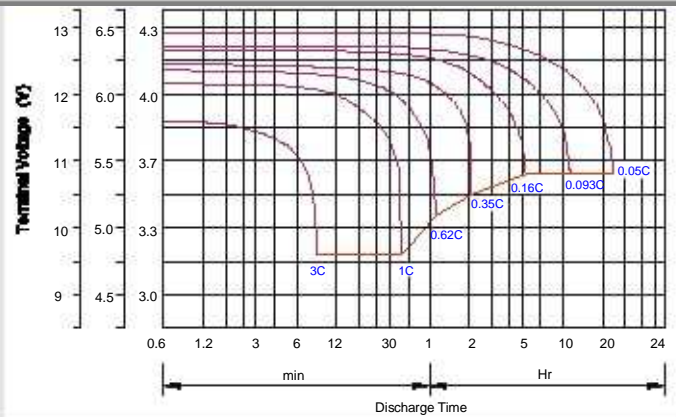

Charging Procedures

Application	Charge Voltage (V)			Max. Charge Current
	Temperature	Set point	Allowable range	
Cycle Use	25°C	14.7	14.4-15.0	0.3C
Standby	25°C	13.7	13.6-13.8	0.3C

Discharge Current VS. Discharge Voltage

Final Discharge Voltage V/cell	1.75V	1.70V	1.60V
Discharge Current (A)	(A) * 0.2C	0.2C < (A) < 1.0C	(A) * 1.0C

Charge the batteries at least once every six months, if they are stored at 25°C.

Charging Method:

Constant Voltage	-0.2Cx2h +7.25-7.45V,24h,Max. Current 0.3CA
Constant Current	-0.2Cx2h +0.1CAx12h
Fast	-0.2Cx2h +0.3CAx4h

Charging Procedures (6V series)

Application	Charge Voltage (V)			Max. Charge Current
	Temperature	Set point	Allowable range	
Cycle Use	25°C	7.35	7.25-7.45	0.3C
Standby	25°C	6.85	6.8-6.9	0.3C

DISTRIBUIDOR:



PLAYA SUR No. 20 INT. 2
COL. MILITAR MARTE
08830 IZTACALCO MEXICO, D.F.
TEL. 7090-7088 Y 7090-7089
ventas@regulacionups.com.mx
www.regulacionups.com.mx