



## NP18-12B NP18-12BFR

Sealed Rechargeable  
Lead-Acid Battery

### 12V, 17.2Ah

### Specifications

- **NOMINAL VOLTAGE:** 12V
- **NOMINAL CAPACITY:**


20 hr. rate of 0.86A to 10.5V	17.2Ah
10 hr. rate of 1.6A to 10.5V	16.0Ah
5 hr. rate of 2.9A to 10.2V	14.5Ah
1 hr. rate of 10.3A to 9.60V	10.3Ah
- **WEIGHT (approx.):** 13.70 pounds (6.2 kgs.)
- **ENERGY DENSITY (20 hr. rate):** 1.47 WH/cubic inch (90 WH/liter)
- **SPECIFIC ENERGY (20 hr. rate):** 15.1 WH/pound (33.28 WH/kg)
- **INTERNAL RESISTANCE OF CHARGED BATTERY:** 11 milliohms (approx.)
- **MAXIMUM DISCHARGE CURRENT WITH STANDARD TERMINALS:** 150 amperes
- **MAXIMUM SHORT-DURATION DISCHARGE CURRENT:** 450 amperes
- **OPERATING TEMPERATURE RANGE:**

CHARGE	5°F to 122°F
	(-15°C to 50°C)
DISCHARGE	-4°F to 140°F
	(-20°C to 60°C)
- **CHARGE RETENTION (shelf life) at 68°F (20°C):**


1 month	97%
3 months	91%
6 months	85%
- **LIFE EXPECTANCY:**

<b>STANDBY USE</b>	3 to 5 years
<b>CYCLE USE (approx.):</b>	
100% depth of discharge	250 cycles
50% depth of discharge	550 cycles
30% depth of discharge	1200 cycles
- **SEALED CONSTRUCTION:** Can be operated in any position without leakage.
- **STANDARD TERMINAL:** Bolt fastened terminal
- **HOUSING MATERIAL:** ABS Resin
- **OPTIONAL:** Container and cover made from Flame Retardant ABS (UL94-V0/L.O.I.>28%)
- **HARDWARE:** 2-M5-.8 x 12mm Bolt w/nuts, lock washer & flat washer

### Terminal

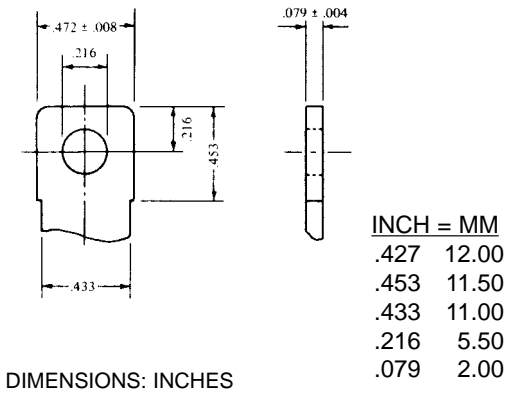

### Dimensions

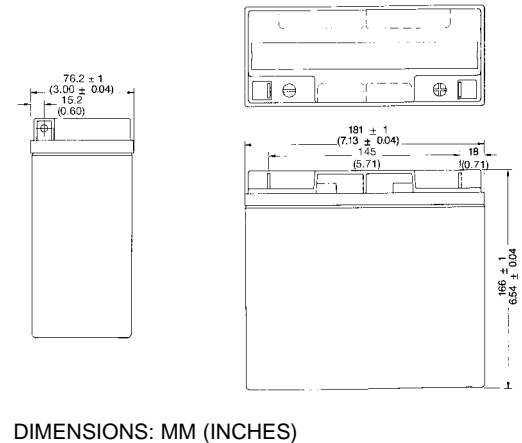

[www.regulacionups.com.mx](http://www.regulacionups.com.mx)




DISTRIBUIDOR:




REGULACIÓN Y SISTEMAS DE ENERGÍA

PLAYA SUR No. 20 INT. 2  
COL. MILITAR MARTE  
08830 IZTACALCO MEXICO, D.F.  
TEL. 7090-7088 Y 7090-7089  
ventas@regulacionups.com.mx  
[www.regulacionups.com.mx](http://www.regulacionups.com.mx)


### DISCHARGE CHARACTERISTIC CURVES AT 25°C (77°F)

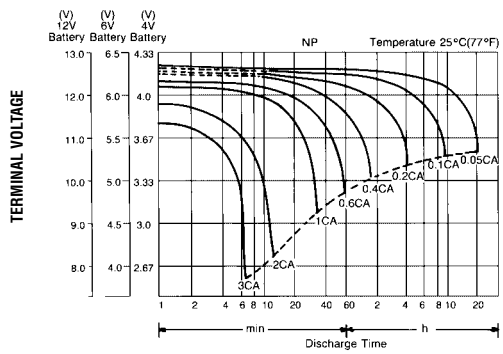


### TEMPERATURE EFFECTS IN RELATION TO BATTERY CAPACITY

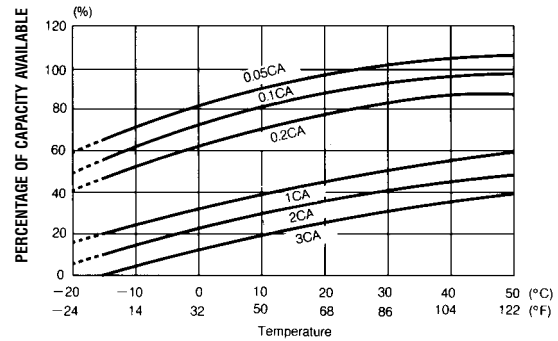


### SELF DISCHARGE CHARACTERISTICS

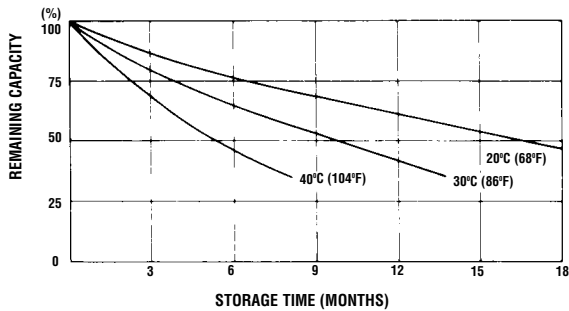


### OPEN CIRCUIT VOLTAGE VS REMAINING CAPACITY

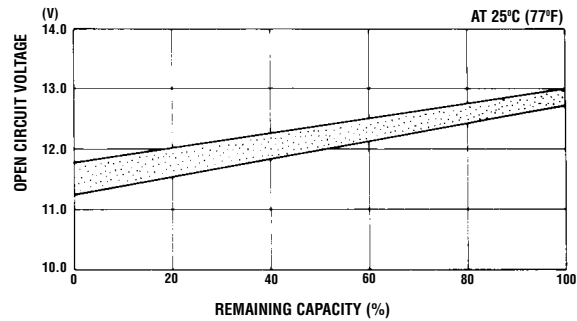

### CYCLE SERVICE LIFE IN RELATION TO DEPTH OF DISCHARGE

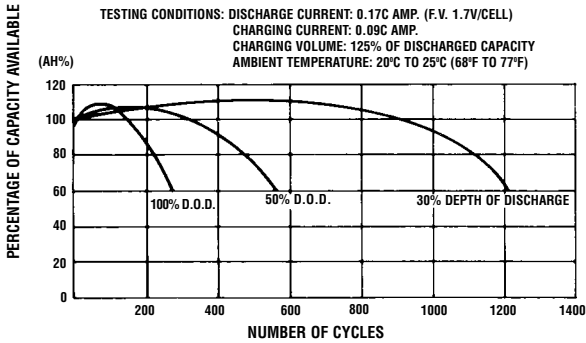

### FLOAT SERVICE LIFE

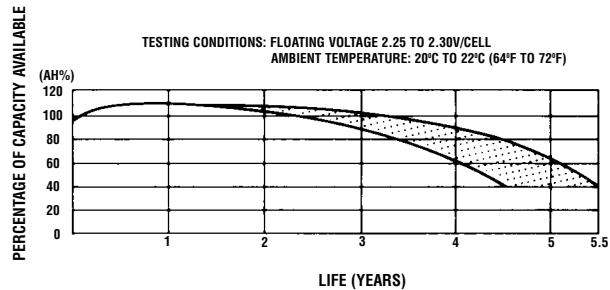

When the battery will be used by current in excess of 3C, consult with EnerSys, Inc. prior to use.

#### CHARGING METHODS (At 20°C)

**Cycle use:** Maximum charging current 4.3A  
 Charging voltage 14.4 to 15.0V  
**Standby use:** Float charging voltage 13.50 to 13.80V

#### CAUTION

- Avoid short circuit
- Do not charge in a sealed container.



**EnerSys Inc.**  
 P.O. Box 14145  
 Reading, PA 19612-4145  
 USA  
 Tel: +1-610-208-1991  
 +1-800-538-3627

**EnerSys EMEA**  
 Brussels, Belgium  
 Tel: +32 (0)2 247 94 47  
**EnerSys Asia**  
 Guangdong, China  
 Tel: +86 755 2689 3639

#### DISTRIBUIDOR:



REGULACIÓN Y SISTEMAS DE ENERGÍA

PLAYA SUR No. 20 INT. 2  
 COL. MILITAR MARTE  
 08830 IZTACALCO MEXICO, D.F.  
 TEL. 7090-7088 Y 7090-7089  
 ventas@regulacionups.com.mx  
 www.regulacionups.com.mx