



# GP 672

**6V 7.2Ah**

GP 672 is a general purpose battery up to 5 years in standby service or more than 260 cycles at 100% discharge in cycle service. As with all CSB batteries, all are rechargeable, highly efficient, leak proof and maintenance free.


## Specification

<b>Cells Per Unit</b>	3
<b>Voltage Per Unit</b>	6
<b>Capacity</b>	7.2Ah @ 20hr-rate to 1.75V per cell @25 °C(77°F)
<b>Weight</b>	Approx. 1.22 kg(2.69 lbs)
<b>Maximum Discharge Current</b>	100A/130A(5sec)
<b>Internal Resistance</b>	Approx. 15.5 mΩ
<b>Operating Temperature Range</b>	Discharge: -15°C~50°C ( 5°F~122°F) Charge: -15 °C~40°C ( 5°F~104°F) Storage: -15°C~40°C ( 5°F~104°F)
<b>Nominal Operating Temperature Range</b>	25°C±3°C(77°F±5°F)
<b>Float Charging Voltage</b>	6.75 to 6.9 VDC/unit Average at 25°C(77°F)
<b>Recommended Maximum Charging</b>	2.16A
<b>Current Limit</b>	
<b>Equalization and Cycle Service</b>	7.2 to 7.5 VDC/unit Average at 25°C(77°F)
<b>Self Discharge</b>	CSB Batteries can be stored for more than 6 months at 25°C(77°F). Please charge batteries before using. For higher temperatures the time interval will be shorter.
<b>Terminal</b>	F1/F2-Faston Tab187/250
<b>Container Material</b>	ABS(UL 94-HB/File E50263)*Flammability resistance of (UL 94-V0/File E88637) can be available upon request.



CSB-manufactured batteries are UL-recognized components under UL924 and UL1989. CSB is also certified by ISO 9001 and ISO 14001.

## Dimensions

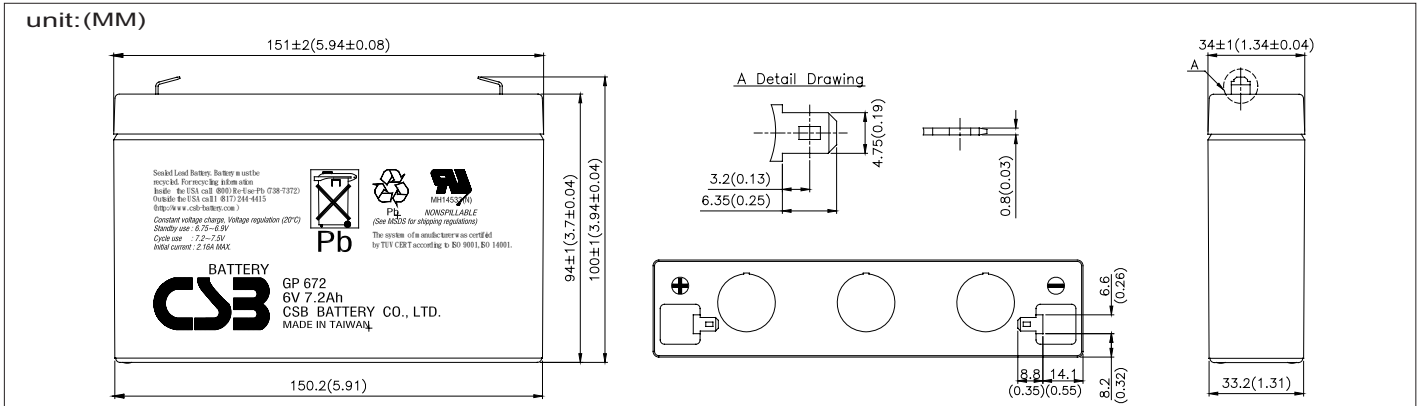

## Constant Current Discharge Characteristics Unit:A (25°C, 77°F)


F.V/Time	5MIN	10MIN	15MIN	30MIN	1HR	2HR	3HR	4HR	5HR	8HR	10HR	20HR
1.60V	28.6	18.6	14.3	8.75	5.28	3.06	2.18	1.72	1.42	0.935	0.758	0.395
1.67V	26.7	17.8	13.9	8.67	5.26	3.05	2.17	1.71	1.41	0.931	0.749	0.383
1.70V	25.7	17.4	13.7	8.62	5.25	3.04	2.16	1.70	1.40	0.930	0.745	0.378
1.75V	24.2	16.7	13.3	8.53	5.24	3.03	2.15	1.69	1.39	0.927	0.737	0.368
1.80V	22.5	16.0	12.8	8.42	5.22	3.02	2.14	1.68	1.38	0.924	0.728	0.358
1.85V	20.8	15.2	12.3	8.30	5.20	3.01	2.13	1.67	1.37	0.921	0.719	0.348

## Constant Power Discharge Characteristics Unit:W (25°C, 77°F)


F.V/Time	5MIN	10MIN	15MIN	30MIN	1HR	2HR	3HR	4HR	5HR	8HR	10HR	20HR
1.60V	172	112	85.5	52.5	31.7	18.4	13.1	10.3	8.52	5.62	4.55	2.37
1.67V	160	107	82.8	51.8	31.6	18.3	13.0	10.2	8.47	5.60	4.52	2.31
1.70V	154	104	81.5	51.4	31.5	18.2	12.9	10.1	8.45	5.59	4.50	2.29
1.75V	145	101	79.4	51.0	31.4	18.1	12.8	10.0	8.42	5.57	4.44	2.23
1.80V	135	96.0	77.0	50.4	31.3	18.0	12.7	9.91	8.38	5.56	4.38	2.16
1.85V	125	91.0	74.3	49.8	31.2	17.9	12.6	9.82	8.35	5.55	4.32	2.10

• All mentioned values are average values.  
 • Tolerance: X<6min(+15%~-15%), 6min ≤ X<10min(+12%~-12%), 10min ≤ X<60min(+8%~-8%), X ≥ 60min(+5%~-5%)


### Trickle (or Float) Service Life

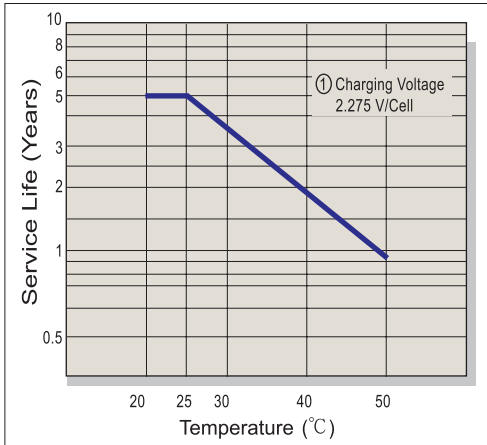


### Capacity Retention Characteristic

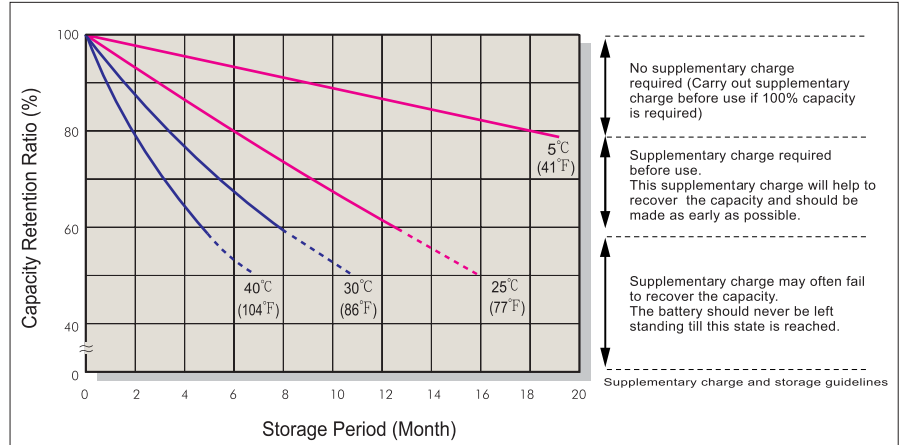


### Battery Voltage and Charge Time for Standby Use

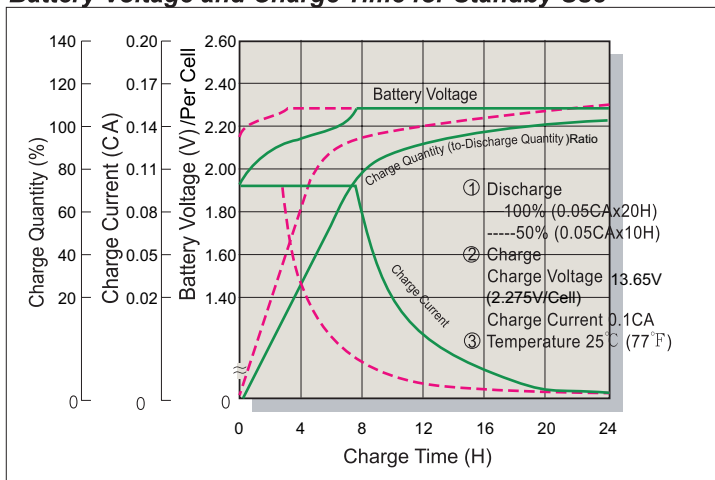


### Cycle Service Life

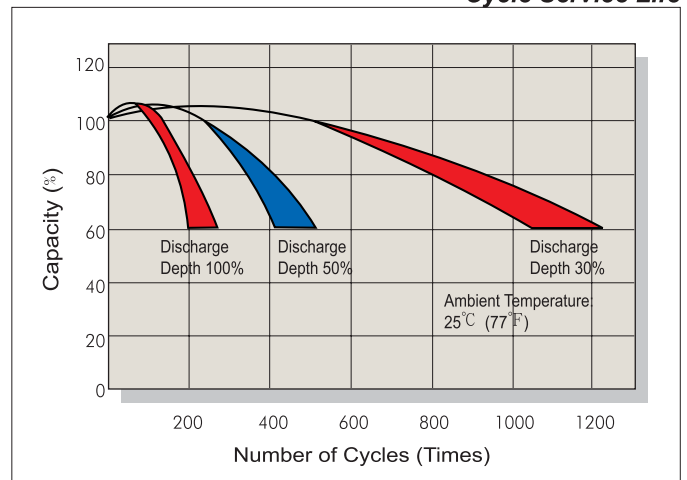

### Battery Voltage and Charge Time for Cycle Use

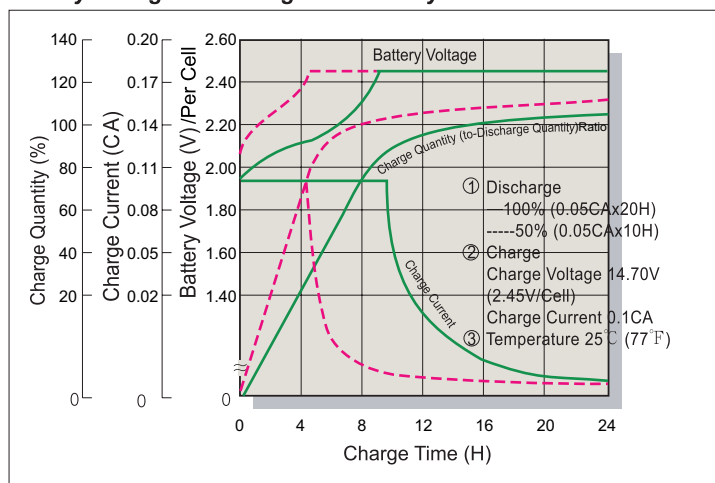

### Terminal Voltage (V) and Discharge Time

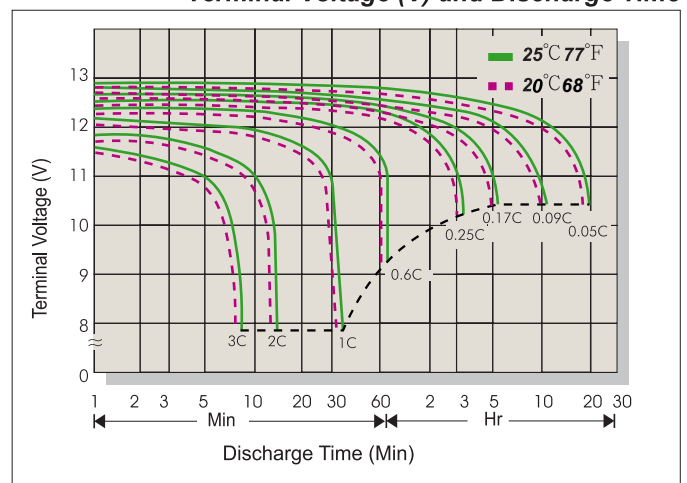

### Charging Procedures

Application	Charge Voltage(V/Cell)			Max.Charge Current
	Temperature	Set Point	Allowable Range	
Cycle Use	25°C (77°F)	2.45	2.40~2.50	0.3C
Standby	25°C (77°F)	2.275	2.25~2.30	

### Discharge Current VS. Discharge Voltage

Final Discharge Voltage V/Cell	1.75	1.70	1.60	1.30
Discharge Current(A)	0.2C>(A)	0.2C<(A)<0.5C	0.5C<(A)<1.0C	(A)>1.0C

### Sales Office

#### DISTRIBUIDOR:



PLAYA SUR No. 20 INT. 2  
 COL. MILITAR MARTE  
 08830 IZTACALCO MEXICO, D.F.  
 TEL. 7090-7088 Y 7090-7089  
 ventas@regulacionups.com.mx  
 www.regulacionups.com.mx